

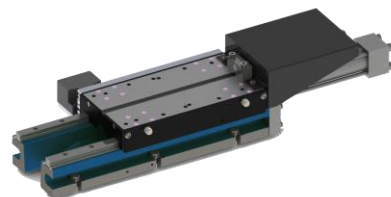
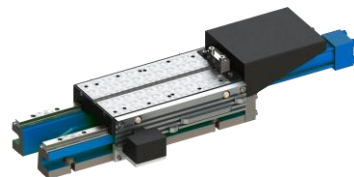
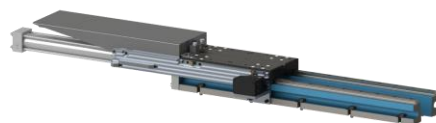



# UA 40 H

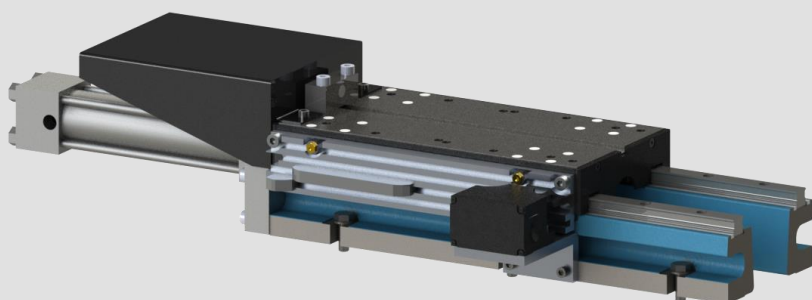


Unité d'avance      UA 40 H  
Vorschubschlitten    UA 40 H  
Slide unit            UA 40 H



52 kg



59 kg

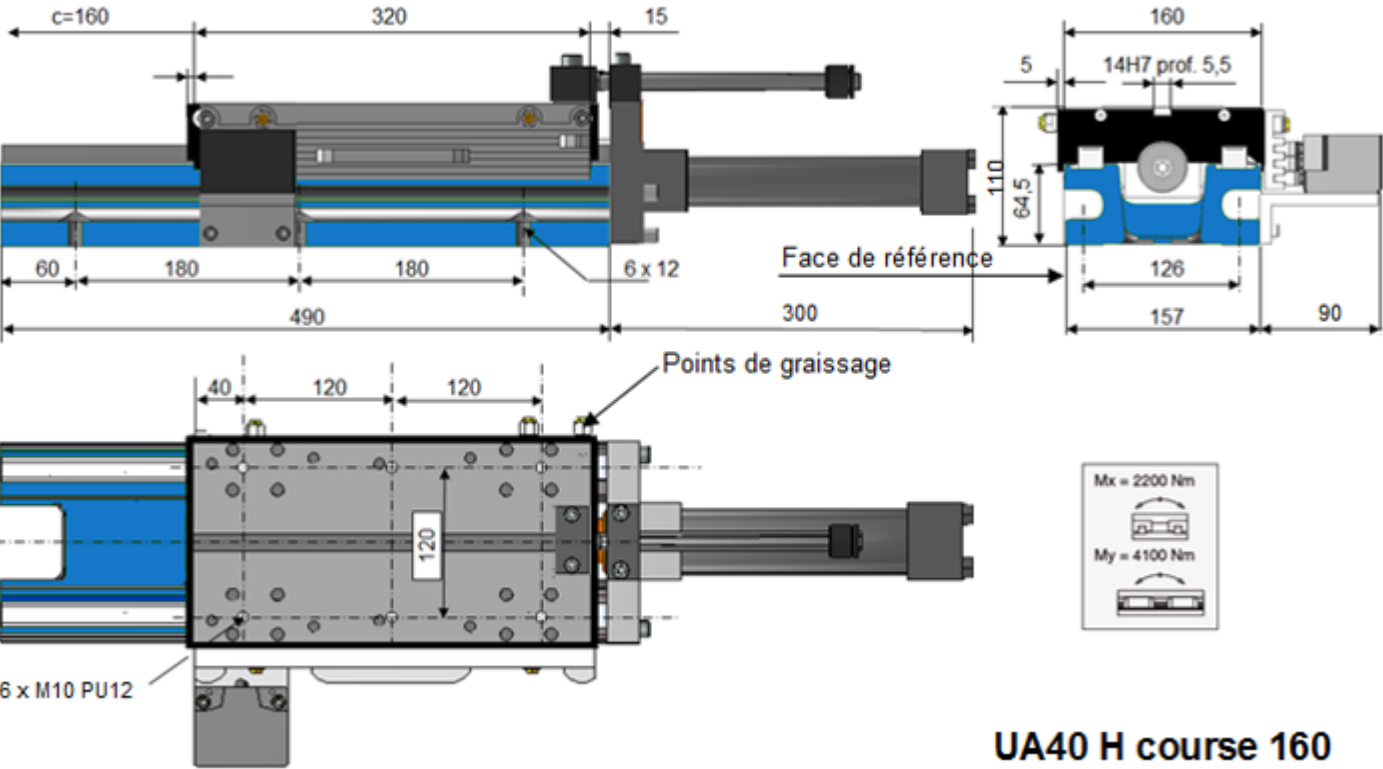

**UA40 H course 160**

| CARACTERISTIQUES TECHNIQUES                                                | TECHNISCHE DATEN                                          | TECHNICAL DATA                                                |
|----------------------------------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------------------|
| Course 160 mm, guidage par rail et patins à billes précontraints taille 20 | Hub 160 mm, Vorspannte Kugelumlaufschlitten Baugröße 20   | Stroke 160 mm, preloaded linear ball system system size 20    |
| Avance par vérin hydraulique ISO 6020/2, DIN 24554                         | Vorschub über Hydraulischerzylinder ISO 6020/2, DIN 24554 | Feed control through hydraulic cylinder ISO 6020/2, DIN 24554 |
| Avance travail mini 60 mm/min                                              | Mindestvorschubgeschwindigkeit 60 mm/min                  | Minimal machining rate 60 mm/min                              |
| Avance rapide maxi 15 m/min                                                | Vorschubgeschwindigkeit Maxi 15 m/min                     | Feed rate maxi 15 m/min                                       |
| Effort poussée 620 daN à 50 bar                                            | Vorschubkraft 620 daN bei 50 bar                          | Thrust 620 daN at 50 bar                                      |
| Effort de recul 320 daN à 50 bar                                           | Rückhubkraft 320 daN bei 50 bar                           | Return thrust 320 daN at 50 bar                               |
| Contrôle course par boîtier multicontact 3 pistes                          | Hubkontrolle durch 3 Spurrigen Reihengrenztaster          | Stroke control through 3 cam rail and switch                  |
| Graissage manuel centralisé                                                | Manuelle Zentral Schmierung                               | Centralized manual lubrication                                |
| Poids 46 kg course 160                                                     | Gewicht 46 kg Hub 160                                     | Weight 46 kg stroke 160                                       |
| OPTIONS                                                                    | OPTIONEN                                                  | OPTIONS                                                       |
| Courses 320, 480 mm<br>Tôles télescopiques, soufflets                      | Hub 320, 480 mm<br>Teleskopstahlabdeckungen, Faltenbalgen | Stroke 320, 480 mm<br>Telescopic or below type way-cover      |